


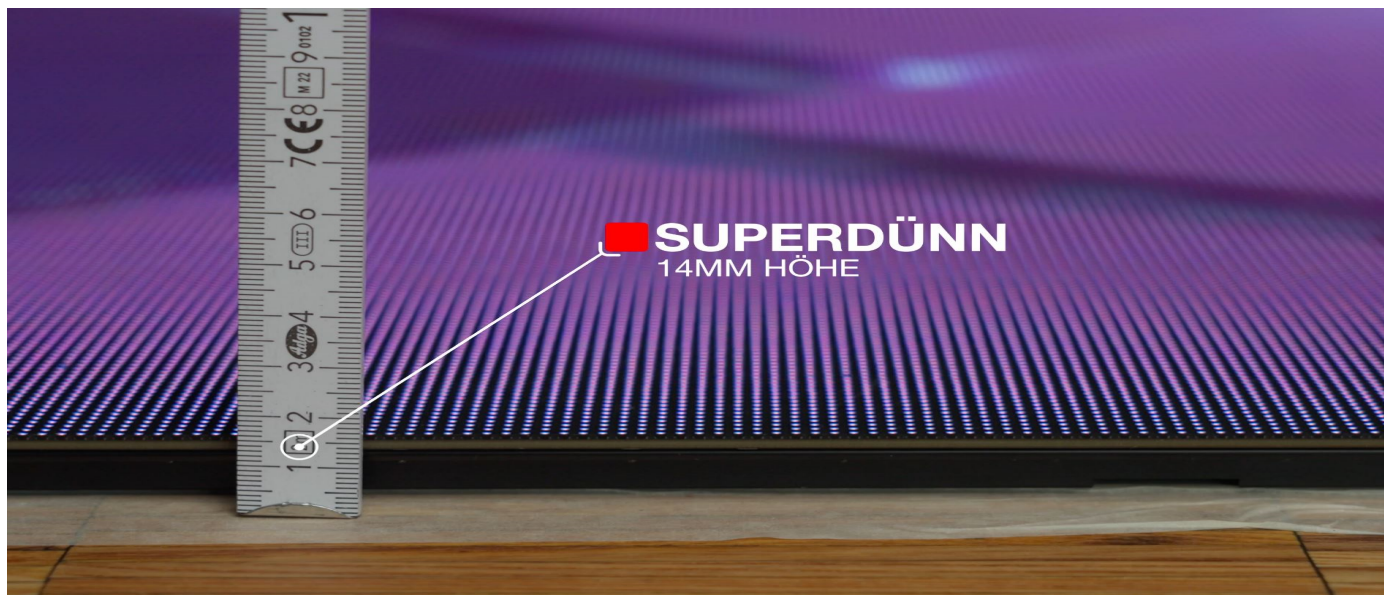

KEY FEATURES

- Super schlankes Design: **14 mm Höhe**
- Extrem belastbar: 4.900 kg/dm²
- Flexibles Design
- Installation in 500 mm Schritten
- [Imagefilm](#)

SPECIFICATIONS

Allgemeine Informationen

Modell	InspireLED 2.6 Carpet
Pixel Pitch	2.604 mm
Umgebung	Indoor
Servicezugang	Front and rear

Displayparameter

LED Anordnung	3 in 1 SMD
LED Typ	SMD1515, GOB
Auflösung	384 x 192 px (pro Cabinet)
Cabinetgröße	500 mm x 1000 mm, 500 mm x 500 mm (optional)
Pixeldichte	147.456 pixel / m ²
Betrachtungswinkel (V / H)	140° / 140°
LED Lebensdauer	>100.000 hrs

Anschlüsse

Eingangssignal	Ethernet
Eingangsfrequenz	50 – 75 Hz
Processing	Novastar

Stromversorgung

Stromversorgung	36 V DC / 5A
Stromverbrauch (Max)	360 W/m ²
Stromverbrauch (Avg)	170 W/m ²

Umwelteigenschaften

Schutzklasse	IP41, IP21
Betriebstemperatur	-20° C to 50° C, 10% to 60% rel. Humidity
Zertifizierungen	CE, ETL, RoHS

Dimensionen

Abmessungen	500 mm x 14 mm x 1000 mm
Gewicht	8.4 kg (16.8 kg / m ²)